



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : D21H 17/67	A1	(11) International Publication Number: <b>WO 97/01670</b> (43) International Publication Date: 16 January 1997 (16.01.97)
<p>(21) International Application Number: PCT/FI96/00379</p> <p>(22) International Filing Date: 27 June 1996 (27.06.96)</p> <p>(30) Priority Data: 953238 29 June 1995 (29.06.95) FI</p> <p>(71) Applicant (for all designated States except US): METSÄ-SERLA OY [FI/FI]; Revontulentie 6, FIN-02100 Espoo (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): SILENIUS, Petri [FI/FI]; Pallotie 5 B 10, FIN-08800 Kirkniemi (FI). LESKELÄ, Markku [FI/FI]; Hakulintie 43 A 5, FIN-08500 Lohja as. (FI).</p> <p>(74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).</p>		<p>(81) Designated States: AU, CA, FI, JP, NZ, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>
(54) Title: FILLER FOR USE IN PAPER MANUFACTURE AND PROCEDURE FOR PRODUCING A FILLER		
<p>TEST EQUIPMENT USED FOR PRECIPITATION OF CALCIUM CARBONATE</p>		
(57) Abstract		

The invention relates to a filler used in paper manufacture and mainly consisting of calcium carbonate, and to a procedure for producing the filler. The filler consists of porous aggregates formed by precipitated calcium carbonate particles. In the procedure, calcium carbonate is precipitated.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# FILLER FOR USE IN PAPER MANUFACTURE AND PROCEDURE FOR PRODUCING A FILLER

The present invention relates to a filler for use in paper manufacture as defined in the preamble of claim 1. Moreover, the invention relates to a procedure for producing said filler.

In the present application, 'paper' refers to various kinds of paper and cardboard, manufactured with paper and cardboard machines, coated or uncoated.

Today, the direction of development of paper products is to an increasing degree determined by customers and legislative measures. The buyers of printing paper want to reduce the postage expenses and the amount of waste produced. Further, packages are subject to waste processing charges dependent on weight. Generally, it seems that energy taxes and environmental protection taxes are being imposed on the price of paper products as a permanent extra encumbrance. For these reasons, paper buyers want products which have a lower grammage while still meeting high quality standards.

Specification FI 931584 presents a composite product based on chemical pulp fibre or mechanical pulp fibre, with calcium carbonate crystals precipitated onto the surface of the product. Further, specification FI 944355 presents a precipitated calcium carbonate, which is in the form of calcite particle aggregates where at least 25% of the particles are of a prismatic shape. Precipitation is performed using a seed material. Further, specification EP 0604095 presents a procedure for the processing of waste material whereby calcium carbonate is precipitated onto the surface of waste material containing inorganic matter; the waste material may contain organic waste fibre, e.g. waste fibre contained in the effluent of a paper mill, with fibre length below 75  $\mu\text{m}$ . The calcium car-

bonate products described in the specifications referred to are intended to be used as fillers in paper manufacture.

5 In the manufacture of high-quality paper, the aim is to produce the paper with a minimum amount of raw material. When the grammage of the paper is reduced, its opacity becomes a critical factor. The opacity can be increased by increasing the filler content of the paper, which, however, generally reduces its  
10 strength. Therefore, the aim is to alter the structure of the paper while at the same time preserving the important good product qualities. For paper based communication to remain competitive in relation to electric communication, the printing quality of paper products  
15 has to be further improved. - These general development trends impose very high requirements on the raw materials and manufacturing processes used in paper production. To meet the requirements, very intensive efforts have been made in recent times to develop paper  
20 raw materials and manufacturing processes.

The object of the present invention is to produce a new kind of calcium carbonate based filler for paper manufacture that meets the criteria described above.

25 A further object of the invention is to produce a new kind of calcium carbonate based filler which has better optic properties than earlier calcium carbonate based fillers.

30 A further object of the invention is to produce a new kind of calcium carbonate based filler which gives the paper better strength properties, especially a better tensile strength, than earlier calcium carbonate based fillers.

35 A further object of the invention is to produce a new kind of calcium carbonate based filler which gives the paper a lower grammage than earlier calcium carbonate based fillers.

A further object of the invention is to produce a new kind of calcium carbonate based filler which has a higher retention than earlier calcium carbonate based fillers.

5 A further object of the invention is to produce a new kind of calcium carbonate based filler which reduces the overall costs of paper manufacture.

An additional object of the invention is to present a procedure for the manufacture of said filler.  
10

As for the features characteristic of the invention, reference is made to the claims.

The invention is based, among other things, on the fact, established via corresponding investigations, that calcium carbonate can be precipitated in a way that causes it to effectively adhere to fibres and noil fibrils. The precipitation can be so performed that porous calcium carbonate aggregates held together by fibrils, i.e. fine fibres, are formed, which aggregates contain plenty of empty space and in which the calcium carbonate particles have precipitated onto the noil fibrils, adhering to them. The noil fibrils with calcium carbonate particles precipitated on them form fibres resembling pearl necklaces, and the calcium carbonate aggregates resemble clusters of pearl necklaces. The aggregates have a very large ratio of effective volume to mass as compared with the corresponding ratio of conventional calcium carbonate used as filler; effective volume here means the volume taken up by pigment in the paper.  
15  
20  
25  
30

The noil fibrils used in the filler of the invention are obtained from cellulose fibre and/or mechanical pulp fibre. The fibrils are produced from cellulose fibre and/or mechanical pulp fibre by refining. Furthermore, the noil fibrils are preferably divided into fractions, thickness 0.1 - 2  $\mu\text{m}$ , length mainly 10 - 400  $\mu\text{m}$ , suitably 10 - 300  $\mu\text{m}$ , preferably  
35

10 - 150  $\mu\text{m}$ . Thus, the noil fibrils consist of cellulose fibre and/or mechanical pulp fibre, which means that they contain no significant amounts of inorganic matter, preferably no inorganic matter at all.

5           The diameter of the calcium carbonate particles in the aggregate is of the order of about 0.2-3  $\mu\text{m}$ , preferably about 0.3-1.5  $\mu\text{m}$ .

          The diameter of the  $\text{CaCO}_3$  crystal aggregates is of the order of about 2-10  $\mu\text{m}$ .

10           Cellulose based noil also contains roundish noil particles which, after the precipitation process, are covered with calcium carbonate particles. In this case, as to its properties, a particle of calcium carbonate filler corresponds in the first place to a hol-  
15 low filler particle having a small unit weight. In reality, the pigment is not completely hollow, because it contains noil; however, the noil has a lower unit weight than calcium carbonate, therefore the particle has a very low unit weight.

20           The new precipitated, calcium carbonate based filler of the invention bestows paper better optic properties and a clearly greater strength than prior-art calcium carbonate based fillers do. Furthermore, the filler of the invention allows the filler content  
25 of paper to be increased without impairing its other properties, e.g. the aforementioned strength properties, such as tensile strength. This is a significant contribution towards lowering the grammage of paper.

          Further, the new filler of the invention has  
30 a clearly better retention in paper manufacture than prior-art calcium carbonate based fillers.

          In consequence of the aforesaid factors, it is generally possible to achieve cost savings in paper manufacture by using the filler of the invention.

35           In prior art, light filler pigments are known, e.g. hollow plastic pigments, which are supposed to provide the same advantages as the calcium

carbonate based filler of the present invention. However, plastic pigments are expensive, which restricts their use. When the filler of the invention is compared with pore filled or lumen filled fibre, it is to be noted that, unlike in the case of aforesaid fibres, the calcium carbonate in the filler of the invention is not inside individual noil fibres but on the surface of the noil. In addition, the mass ratio of calcium carbonate and fibrous matter is much larger in the filler of the invention than in pore filled or lumen filled fibre. Thus, the filler of the invention is a completely new product, and it should not be confused with prior-art pore filled or lumen filled fibre.

The filler of the invention and the procedure for its manufacture differ from the specification FI 931584 referred to in the introduction especially on the basis of the thickness and length of the noil fibrils, i.e. in the present application, the noil fibrils have been refined with a pulp refiner. From the filler and manufacturing method described in specification FI 944355, the filler and manufacturing method of the present invention likewise differ in respect of the refined noil fibrils; in addition, in the specification referred to, the calcite particles are of a prismatic shape and their production requires the use of a special seed material. With respect to the product and procedure presented in specification EP 0604095, the product and procedure of the present invention likewise differ on the basis of the refinement and size of the noil fibrils; in addition, the fibre material used in the specification referred to is waste fibre containing inorganic or other matter. - In general, in addition to the differences stated above, the filler of the present invention differs from those described in the reference specifications on the basis of the good optic properties, strength properties and very high retention achieved, and especially on the

basis of the combination of exceptionally good optic and strength properties.

The fibre used in the procedure of the invention may consist of chemical, mechanical or semi-mechanical pulp produced by any pulp or paper manufacturing method known in itself, or a combination of these in arbitrary proportions, the proportion of each component being 0 - 100 % by weight. The refining of the pulp into noil fibrils can be implemented using any pulp refiner known in itself in pulp processing industry. When desirable, the refined noil fibrils can be screened by any fractionating method known in itself in pulp processing, e.g. using a wire screen, into the desired fibril size.

In precipitation, the noil, i.e. e.g. pulp based or other fibre based noil, is refined with a pulp refiner and screened, preferred fractions being e.g. wire screen fractions P100-P400.

In the procedure of the invention, calcium carbonate can be precipitated from any suitable solution or mixture, e.g. from a mixture of  $\text{Ca(OH)}_2$  water solution and solid  $\text{Ca(OH)}_2$  or from a calcium hydroxide water solution. Thus, precipitation can be implemented using any substance that precipitates calcium carbonate, e.g. carbon dioxide, such as gaseous carbon dioxide, suitably 1-100 %, preferably 10-100 % carbon dioxide gas. Instead of calcium hydroxide and carbon dioxide, it is possible to use any reaction producing calcium carbonate, e.g. the reaction between calcium chloride and sodium carbonate, producing calcium carbonate and sodium chloride.

The precipitation of calcium carbonate is performed on the surface of noil originating from cellulose fibre, suitably noil fibrils. The concentration of noil in the precipitation process is suitably 0.0001 - 18 w-%, preferably 0.4 - 10 w-%. When calcium hydroxide is used, the mass ratio of calcium hydroxide



and cellulose fibres in precipitation is suitably 0.1 - 20, preferably 1.4 - 4. The precipitation temperature is in the range 5 - 150 °C, suitably 10 - 90 °C, preferably 15 - 80 °C.

5           In the carbon dioxide method, the net reaction is



In the chloride method, the net reaction is



10           Calcium carbonate precipitates when the calcium compounds react according to the reaction equations. It is possible to influence the crystal size and/or shape by adjusting the reaction conditions.

15           The precipitation can be advantageously effected in a specific reactor where e.g. calcium hydroxide and noil are mixed. The carbonation reaction is implemented by supplying carbon dioxide, e.g. gaseous carbon dioxide, into the reactor. The progress of the reaction can be monitored by measuring the pH and conductivity of the mixture. The mixing and the supply of  
20           gas can be terminated when the pH of the mixture has fallen to the value of about 7.5, depending on the pH value of the noil. The carbonation is carried out e.g. in a water solution or mixture of  $\text{Ca(OH)}_2$ .

25           If desirable, it is possible to add a dispersing agent, e.g. sodium hexametaphosphate (Na-HMF) or other dispersing agent(s), into the filler produced.

30           The filler of the invention can be used as filler as such or in any ratio of mixture (0-100 %) with another filler or other fillers. The amount of filler used in paper is 0.1 - 50 w-%, preferably 0.1 - 30 w-%.

35           The filler of the invention and the procedure for its manufacture are described in more detail in the following embodiment examples by referring to the attached drawings, in which

Fig. 1 presents the equipment used in the

procedure of the invention;

Fig. 2-4 present pictures taken of the filler of the invention by means of an electron microscope;

Fig. 5-8 present graphs representing the properties of the filler of the invention as compared with those of a prior-art filler.

#### EXAMPLE 1. Production of filler.

Bleached pine sulphate pulp was refined in a Valley laboratory hollander in accordance with the SCAN-C 25:-76 standard for 2.5 hours. The refined pulp was screened by means of a Bauer-McNett screen, initially using the wire sequence 14-50-100-200 mesh. The amount of dry matter screened at a time was 45 g. The fraction passed through the 200 mesh wire (P200 fraction) was saved and allowed to settle for 2 days, whereupon the aqueous phase on its surface was separated.

The P200 fraction was further fractionated with the wire sequence 100-200-290-400 mesh. The 100 mesh wire was used to equalize the screening process and prevent the 200 mesh wire from getting blocked at the initial stage. The fraction passed through the 400 mesh wire (P400 fraction) was saved and, after the noil fraction had settled, the aqueous phase on the surface was separated.

The P400 fraction was thickened by centrifugation to a consistency of 4.7 g/l, whereupon the noil was ready for use in the production of a filler.

The filler was produced in a mixing tank reactor 1, Fig. 1. The reactor had a capacity of 5 litres and its temperature could be regulated via a water circulation system 2 in its casing. The reactor contained four vertical foul plates designed to increase the mixing efficiency. A gas mixture of carbon dioxide and nitrogen was supplied via a pipe 3 to a point below the mixer element. The flow and carbon

dioxide content of the gas mixture could be adjusted by means of control valves 5, 6 provided in the gas pipes 3, 4. Measuring sensors 7, 8, 9 were placed in the reactor via holes in the cover. The measuring elements were connected to a computer 10, in which the measurement data was collected and stored.

Precipitation was performed at a temperature of 35 °C and the carbon content of the gas mixture was adjusted to a value of 15 % by volume; the reaction volume was 3.2 l.

The filler was produced using three different  $\text{Ca(OH)}_2$ /noil ratios. The proportions of raw materials are presented in Table 1.

Table 1. Proportions of raw materials

	Precipit- ation 1	Precipit- ation 2	Precipit- ation 3
$m_{\text{noil}}$ , g	15	15	15
$m_{\text{Ca(OH)}_2}$ , g	22	35	50
$V_{\text{nitrogen}}$ , l/min	5.25	8.36	11.94
$V_{\text{carbon dioxide}}$ , l/min	0.93	1.48	2.11

Before the reaction was started, the noil was homogenized by mixing it in the reactor for 5 min at a mixing speed of 600 l/min. At this stage, a small nitrogen flow was used to prevent the gas pipes from getting blocked. After this, the mixing speed was adjusted to the value 1000 l/min, and calcium hydroxide was added into the reactor. The measuring sensors were placed in the reactor and the reaction was started by opening the  $\text{CO}_2$  flow as well. The progress of the reaction was monitored by measuring the pH, 8, and conductivity, 9, of the mixture. The mixing and gas supply were stopped when the pH, 8, had fallen to the value 7.5.

Pictures of the product obtained were taken with an electron microscope (SEM), Fig. 2, 3, 4. From the SEM pictures it can be seen that the product consists of porous calcium carbonate aggregates held together by noil fibrils and containing plenty of empty space, with  $\text{CaCO}_3$  particles precipitated onto the noil fibrils, adhering to them. The calcium carbonate particles in the aggregate have a diameter of 0.3-1.5  $\mu\text{m}$  and a roundish and partly shuttle-like shape. The diameter of the aggregates varies between about 2 - 10  $\mu\text{m}$ . The noil/ $\text{CaCO}_3$  fibrils can be described as resembling pearl necklaces and the aggregates as resembling clusters of pearl necklaces. There are also roundish noil particles (Fig. 3), and these are covered with tiny  $\text{CaCO}_3$  particles. In this case, we can even speak of a hollow  $\text{CaCO}_3$  pigment, which has a low unit weight (the pigment is not completely hollow because there is some noil inside it; however, noil has a lower unit weight than calcium carbonate). According to an X-ray diffraction analysis, 100 % of the precipitated calcium carbonate consisted of calcite.

#### EXAMPLE 2. Properties of paper

To test the technical potential of the filler in paper manufacture, a series of sheet tests were performed, in which the properties of the paper were compared when two fillers as provided by the invention and calcium carbonate fillers already available in the market, PCC (Albacar LO) and GC (Fincarb 6005) were used.

For the production of laboratory sheets, a pulp mixture containing 75 w-% bleached mechanical pulp and 25 w-% bleached pine sulphate pulp was prepared. The pulp was refined in a Valley laboratory hol-  
lander to SR number 30 in accordance with the SCAN-C 25:76 standard, the refining time being 38 min.

The fillers obtained from precipitations 1

and 2 presented in Fig. 1 were used undiluted in the production of laboratory sheets, and the filler from precipitation 3 was diluted to one half of its consistency after precipitation. For the production of reference sheets, solutions having a consistency of 25 g/l were prepared from commercial  $\text{CaCO}_3$  fillers.

In a laboratory sheet mould, 60 g/m<sup>2</sup> sheets were produced without circulation water according to the standards SCAN-C 26:76 and SCAN-M 5:76 except for drum drying and corresponding wet pressing of the sheets. As retention agents, cationic starch (Raisamyl 135) 0.65 % and silica 0.15 % of the fibre mass were used.

For wet pressing corresponding to drum drying, the sheets were piled up as follows:

	Top of pile →	press plate
		2 dried blotting boards
		new blotting board
20		laboratory sheet
		couching board
		2 dried blotting boards
	Bottom of pile →	press plate

The sheet pile was placed in the press and it was pressed by applying a pressure of 490 ± kPa to the sheets for 4 minutes. After the wet pressing, the blotting boards on either side of the sheets were left sticking to the sheets and the sheets were placed in a cold drying drum. The sheets were dried in the drum at a temperature of 1000 °C for 2 h. After the drying, the blotting boards were released from the sheets and the sheets were seasoned for at least 24 h at a temperature of 23 ± 1 °C, the relative humidity being 50 ± 2 %.

For the finished sheets, the calcium carbonate content, grammage, ISO whiteness, light-scattering

coefficient and tensile index were determined. The results are presented in Tables 2, 3 and 4.

5 Table 2. Paper properties obtained using a filler as provided by the invention

	Precipit- ation 1		Precipit- ation 2		Precipit- ation 3	
CaCO <sub>3</sub> content, %	10.2	15.8	12.1	17.1	12.8	17.7
grammage, g/m <sup>2</sup>	65.0	66.3	65.1	65.6	65.0	66.0
ISO whiteness, %	72.4	75.0	73.1	75.9	74.0	76.8
light-scattering coeff., m <sup>2</sup> /kg	74.4	82.6	77.0	87.2	78.6	90.3
tensile index, Nm/g	48.8	47.4	50.0	44.9	45.4	40.7

10 Table 3. Paper properties obtained using commercial CaCO<sub>3</sub> fillers

	PCC			GC		
CaCO <sub>3</sub> content, %	11.8	18.3	22.9	11.6	18.0	22.0
grammage, g/m <sup>2</sup>	65.1	68.3	66.7	67.5	63.6	68.4
ISO whiteness, %	73.1	75.0	76.1	72.6	73.7	74.5
light-scattering coeff., m <sup>2</sup> /kg	76.8	85.8	88.4	72.8	77.5	82.4
tensile index, Nm/g	33.3	28.4	26.6	36.9	31.6	28.7

15 Calcium carbonate retention was on an average 92 % for the filler of the invention, 64 % for commercial precipitated calcium carbonate (PCC) and 62 % for commercial ground calcium carbonate (GC).

Table 4. Paper properties with mere pulp without filler

5	CaCO <sub>3</sub> content, %	0
	grammage, g/m <sup>2</sup>	64.7
	ISO whiteness, %	71.2
	light-scattering coeff., m <sup>2</sup> /kg	62.0
	tensile index, Nm/g	56.2

10 Fig. 5-8 present the results in the form of graphs. In Fig. 5-8, the references S1, S2 and S2 correspond to the results shown in the table with fillers obtained from precipitations 1, 2 and 3, respectively; the references PCC and GC indicate results obtained with commercial precipitated calcium carbonate and ground calcium carbonate, respectively. Fig. 5 and 6 indicate that the filler of the invention has better optic properties as compared with the corresponding properties with commercial CaCO<sub>3</sub> fillers used in the same CaCO<sub>3</sub> contents. Fig. 7 shows that the tensile strength in the case of the filler of the invention is clearly better than in the case of commercial CaCO<sub>3</sub> fillers used in the same CaCO<sub>3</sub> contents. In addition, Fig. 8 shows the light-scattering coefficient as a function of the tensile index. In this survey, both the optic properties of the paper and its runnability on a paper machine are considered. In this survey, the filler of the invention is clearly better than commercial CaCO<sub>3</sub> fillers. In other words, with the same light-scattering coefficient values, the filler of the invention gives a clearly better tensile strength than do commercial CaCO<sub>3</sub> fillers. From the graphs we can see a trend of improving optical properties and decreasing tensile strength of the paper as the ratio  $m_{\text{Ca(OH)}_2}/m_{\text{H}_2\text{O}}$  in precipitation increases.

The excellent properties of the new type of porous CaCO<sub>3</sub> filler described in the foregoing allow

the  $\text{CaCO}_3$  content to be increased and the grammage of paper to be further reduced without impairing other important qualities of paper. Considering the improved retention of the filler of the invention in paper manufacture, the aforesaid good results together also allow cost savings to be achieved.

The embodiment examples are intended to illustrate the invention without limiting it in any way.



## CLAIMS

1. Filler for use in paper manufacture, consisting of porous aggregates precipitated onto the surface of noil and formed by calcium carbonate particles, **characterized** in that the calcium carbonate is precipitated onto the surface of noil fibrils produced by refining from cellulose fibre and/or mechanical pulp fibre.

2. Filler as defined in claim 1, **characterized** in that the calcium carbonate is precipitated onto the surface of fractionated noil fibrils forming  $\text{CaCO}_3$  crystal aggregates held together by the noil fibrils.

3. Filler as defined in claim 1 or 2, **characterized** in that the thickness of the noil fibrils is mainly  $0.1 - 2 \mu\text{m}$  and the length mainly  $10 - 400 \mu\text{m}$ , suitably  $10 - 300 \mu\text{m}$ , preferably  $10 - 150 \mu\text{m}$ .

4. Filler as defined in any one of claims 1-3, **characterized** in that the diameter of the calcium carbonate particles precipitated onto the surface of the noil fibrils is of the order of  $0.2-3 \mu\text{m}$ .

5. Filler as defined in any one of claims 1-4, **characterized** in that the diameter of the  $\text{CaCO}_3$  crystal aggregates is  $2-10 \mu\text{m}$ .

6. Filler as defined in any one of claims 1-5, **characterized** in that the mass ratio of calcium carbonate and noil in the filler is  $13.5 - 2700 \%$ .

7. Procedure for producing a filler for use in paper manufacture, said filler mainly consisting of porous aggregates formed by calcium carbonate particles, said calcium carbonate being precipitated onto the surface of noil, **characterized** in that the calcium carbonate is precipitated onto the surface of noil fibrils produced by refining from cellulose fibre and/or mechanical pulp fibre.

8. Procedure as defined in claim 7, **characterized** in that the noil fibrils are so fractionated


that their thickness is mainly 0.1 - 2  $\mu\text{m}$  and their length mainly 10 - 400  $\mu\text{m}$ , suitably 10 - 300  $\mu\text{m}$ , preferably 10 - 150  $\mu\text{m}$ .

5 9. Procedure as defined in claim 7 or 8, **characterized** in that the consistency of noil in precipitation is 0.0001 - 18 % by weight, preferably 0.4 - 10 % by weight.

10 10. Procedure as defined in any one of claims 7-9, **characterized** in that the precipitation is performed using carbon dioxide and that the mass ratio of calcium hydroxide and noil in precipitation is 0.1 - 20, preferably 1.4 - 4.

15 11. Procedure as defined in any one of claims 7-9, **characterized** in that the precipitation is performed by a chloride method and that the mass ratio of calcium chloride and noil in precipitation is 0.15 - 30, preferably 2.1 - 6.

20 12. Procedure as defined in any one of claims 7-11, **characterized** in that the precipitation temperature is 5 - 150  $^{\circ}\text{C}$ , preferably 10 - 90  $^{\circ}\text{C}$ , more preferably 15 - 80  $^{\circ}\text{C}$ .

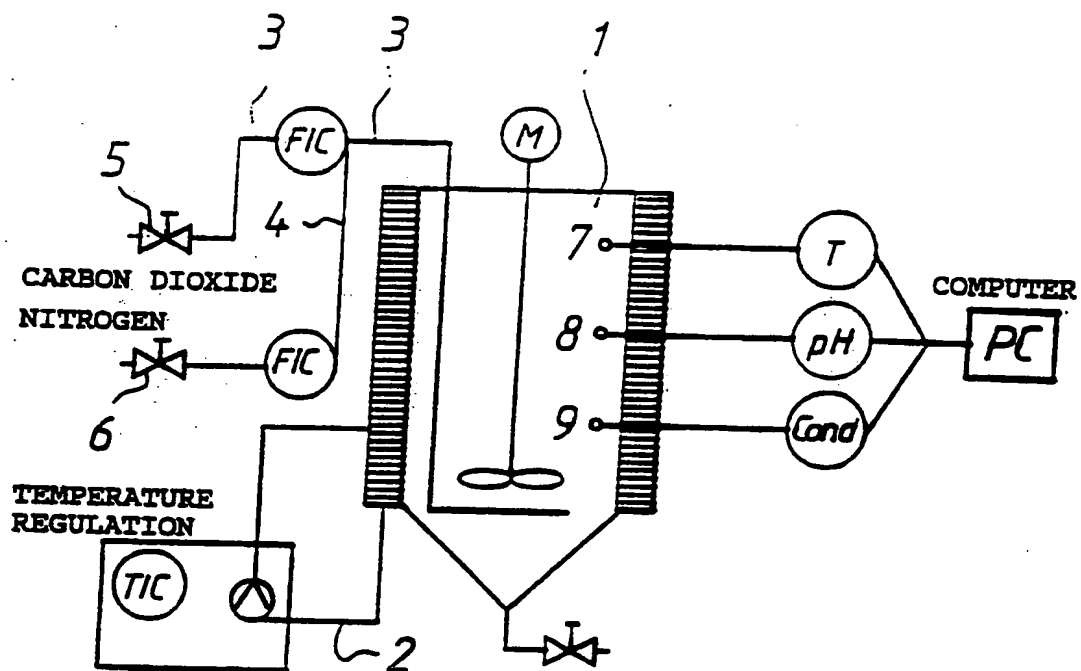

TEST EQUIPMENT USED FOR PRECIPITATION OF CALCIUM CARBONATE

*Fig 1*

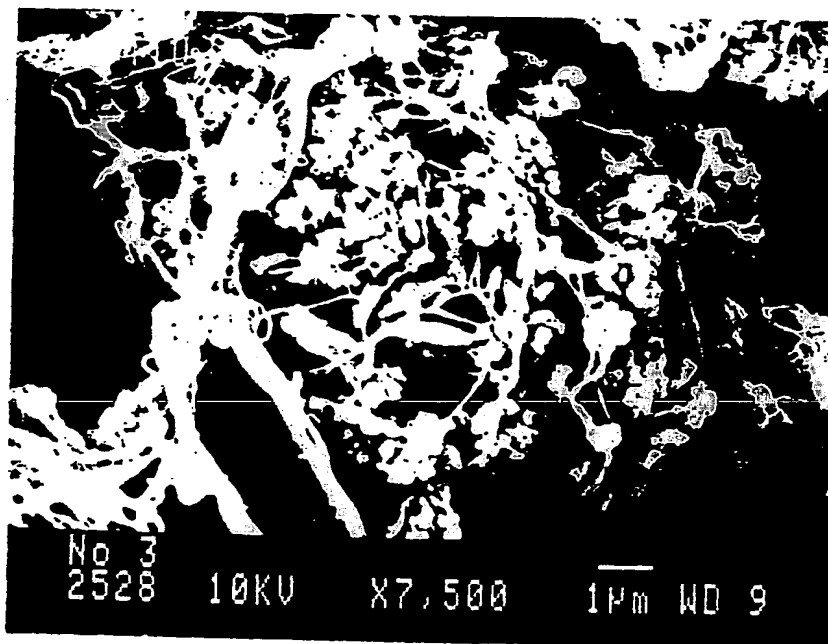


Fig. 2

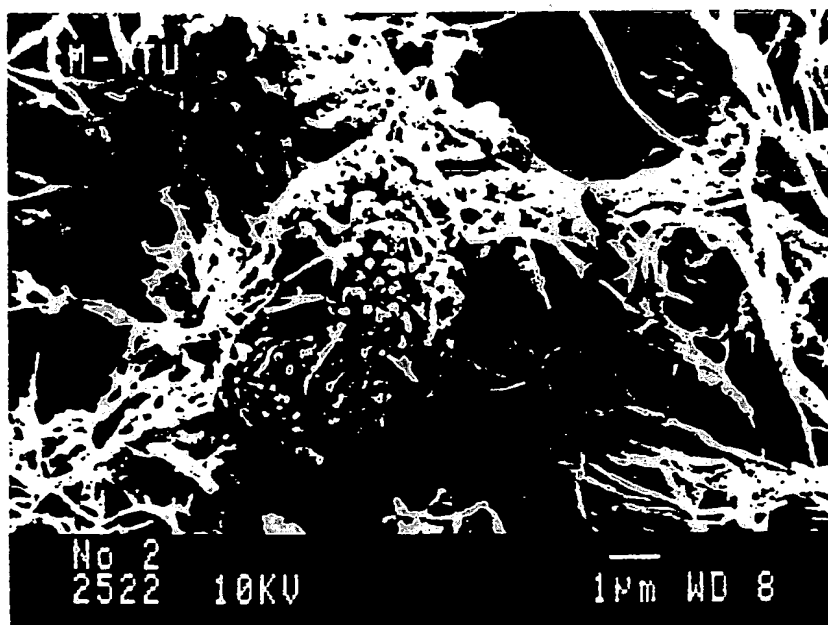


Fig. 3

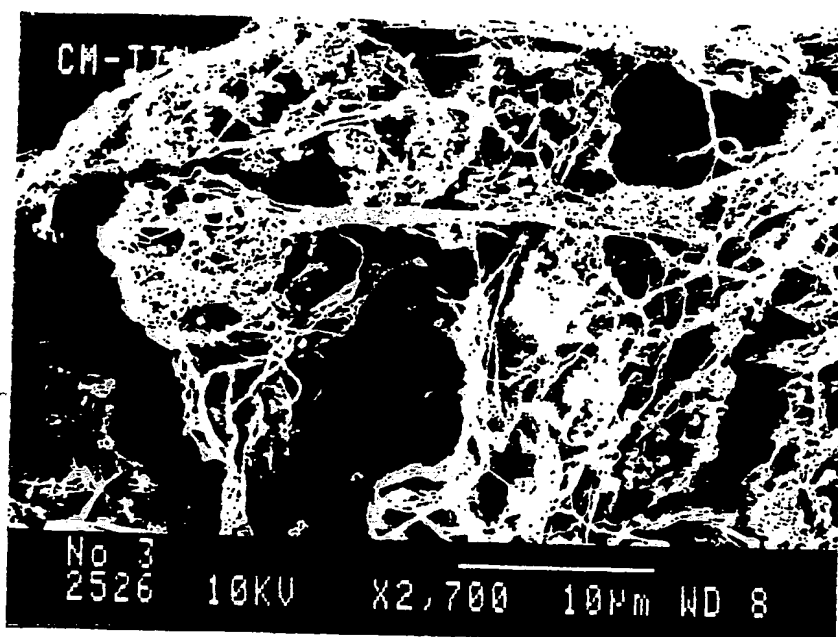


Fig.4

4/5

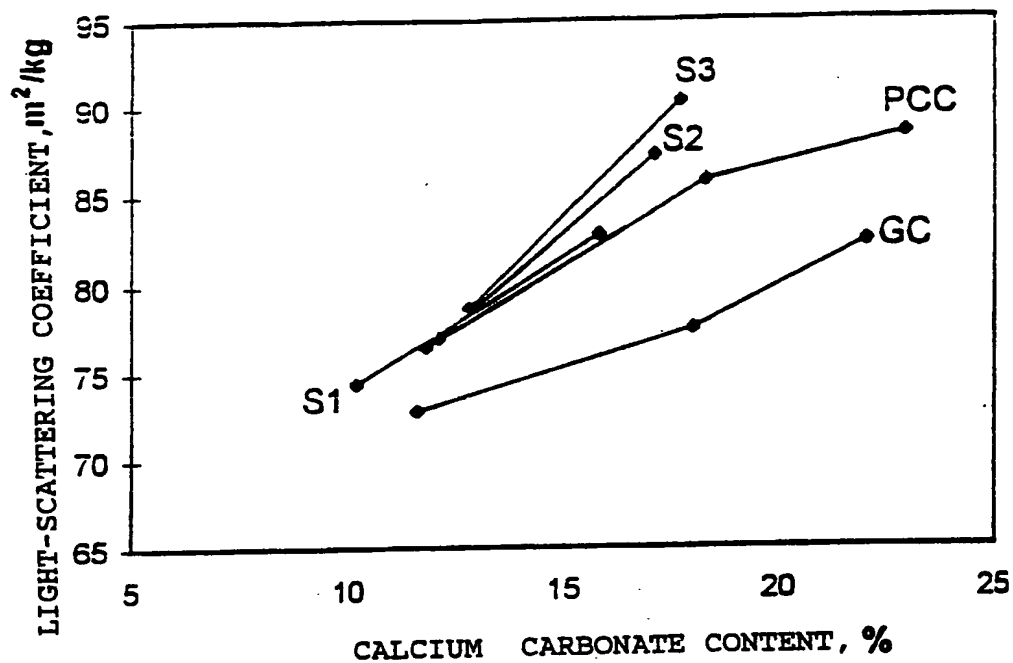


FIG. 5

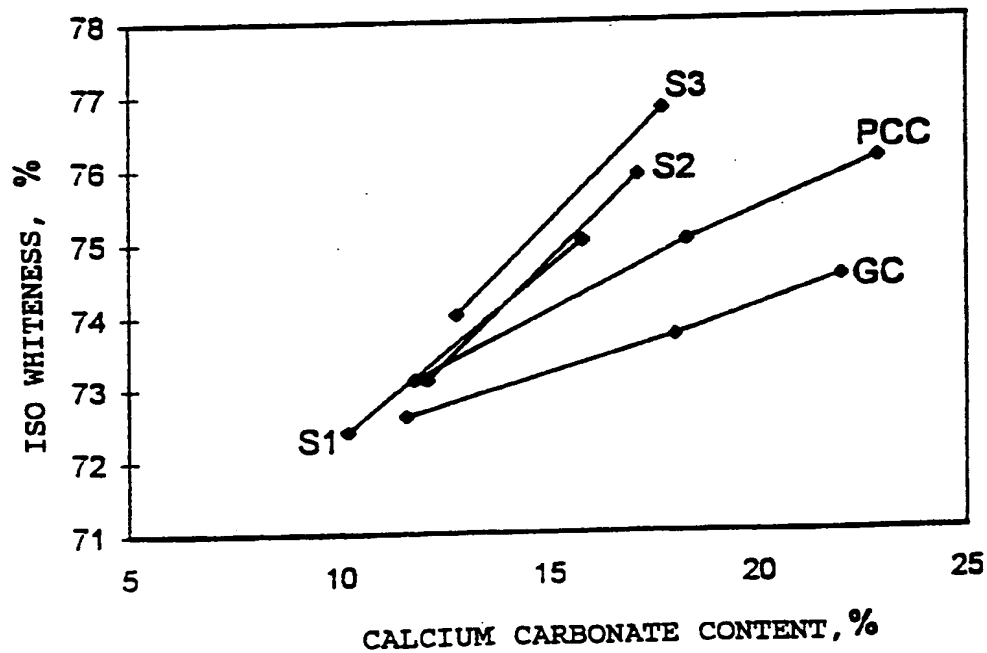


FIG. 6

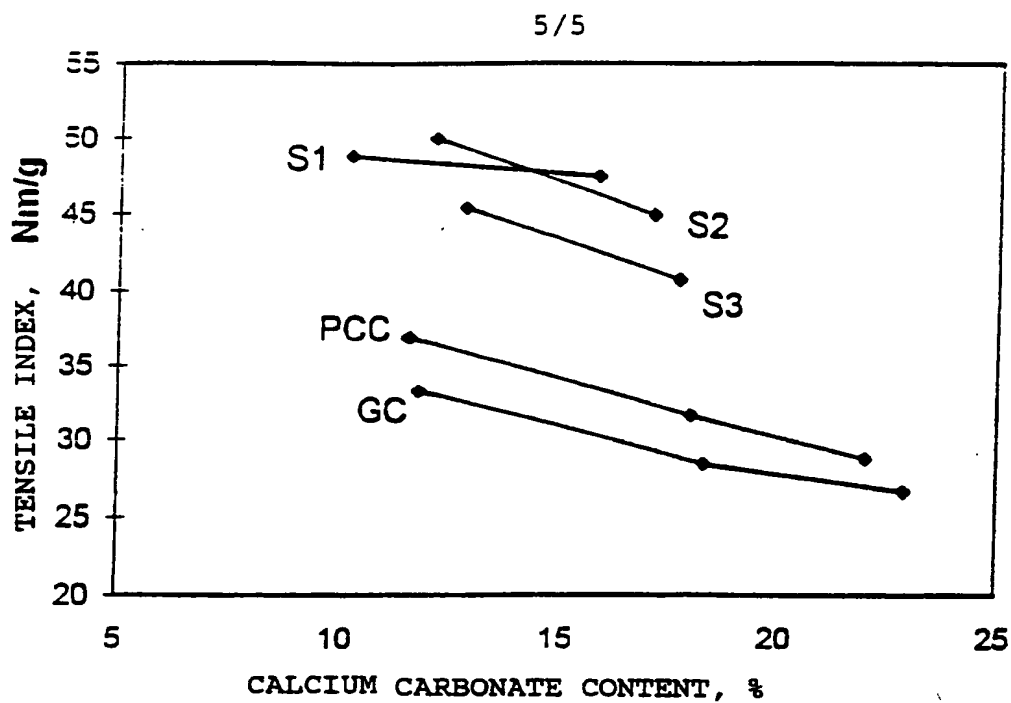


FIG. 7

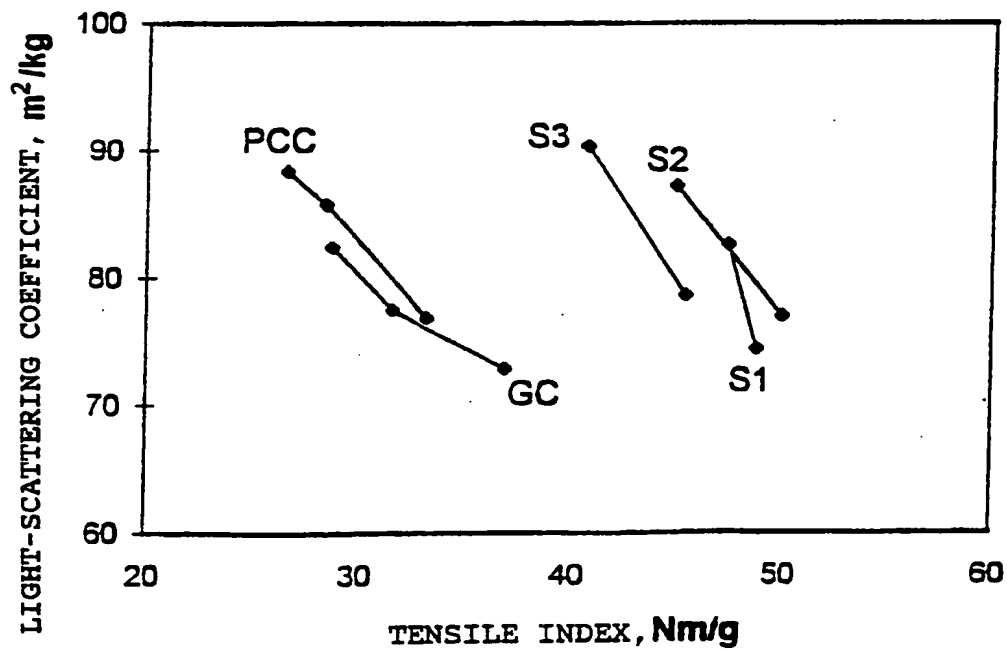


FIG. 8

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00379

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: D21H 17/67

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PAPERCHEM, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2265916 A (AUSSEDAT-REY S.A.), 13 October 1993 (13.10.93), page 3, line 30 - page 4, line 26; page 14, line 30 - page 15, line 9, abstract, the claims	1-12
	--	
A	EP 0604095 A1 (ECC INTERNATIONAL LIMITED), 29 June 1994 (29.06.94), abstract, claims 1,5-7, 9-15	1-12
	--	
A	WO 9320010 A1 (MINERALS TECHNOLOGIES, INC.), 14 October 1993 (14.10.93)	1-12
	-----	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 Sept 1996

Date of mailing of the international search report

27 -09- 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Barbro Nilsson  
Telephone No. +46 8 782 25 00



# INTERNATIONAL SEARCH REPORT

Information on patent family members

05/09/96

International application No.

PCT/FI 96/00379

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2265916	13/10/93	AT-A- 70993	15/06/95
		AT-B- 400565	25/01/96
		BE-A- 1006908	24/01/95
		CA-A- 2093545	08/10/93
		CH-A- 686963	15/08/96
		DE-A- 4311505	14/10/93
		FR-A- 2689530	08/10/93
		IT-B- 1260643	22/04/96
		IT-D- T0930240	00/00/00
		JP-A- 6158585	07/06/94
		NL-A- 9300612	01/11/93
		PT-A- 101250	29/04/94
		SE-A- 9301169	08/10/93
EP-A1- 0604095	29/06/94	BR-A- 9305222	09/08/94
		FI-A- 935751	24/06/94
		GB-A- 2273701	29/06/94
		JP-A- 6226264	16/08/94
		AU-A- 8043094	22/06/95
		BR-A- 9404992	08/08/95
		CA-A- 2137951	15/06/95
		CZ-A- 9403152	12/07/95
		EP-A- 0658606	21/06/95
		FI-A- 945830	15/06/95
		JP-A- 8049186	20/02/96
		NO-A- 944783	15/06/95
WO-A1- 9320010	14/10/93	AU-A- 3920493	08/11/93
		EP-A- 0633864	18/01/95
		FI-A- 944355	03/10/94
		JP-T- 7509684	26/10/95

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**